


# **SONIQ**

55" FullHD LED LCD Smart TV

S55V16A-AU

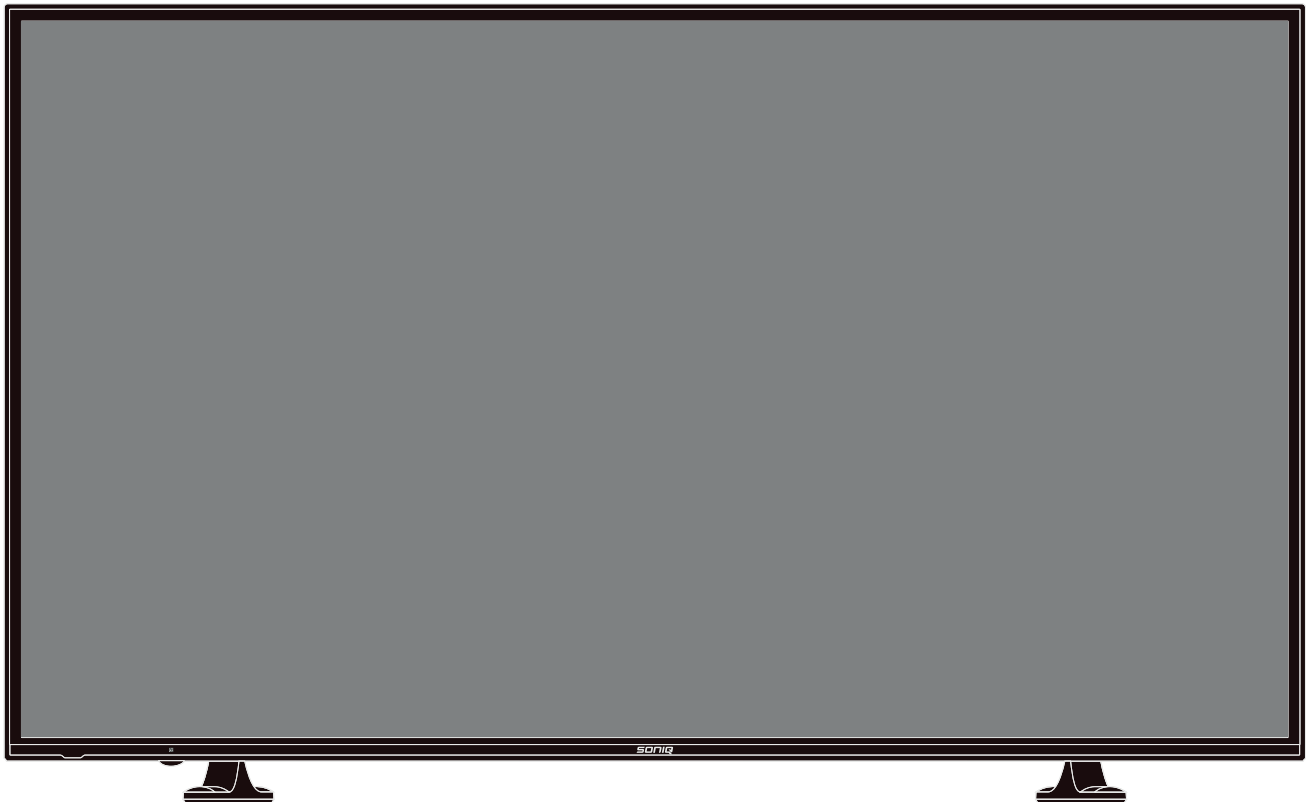

## QUICK REFERENCE GUIDE

Thank you for purchasing the unit.  
Your unit integrates digital and analog tuner in the same unit.

Thanks for purchasing the unit. Your unit integrates digital and analog tuner in the same unit. You can enjoy both digital and analog broadcasting under following set-up easily.

The latest news, software, utility, driver, product, manual and Q&A will be found at SONIQ website.


[Http://www.soniq.com](http://www.soniq.com)

**Stand Installation**

Before performing work, please lay the TV on the stand to prevent it from being damaged.

Fix the stand and the unit together with screws. To remove the stand, reverse instruction as above.


Screws: M4X10mm(X4), ST4X12mm(X2).

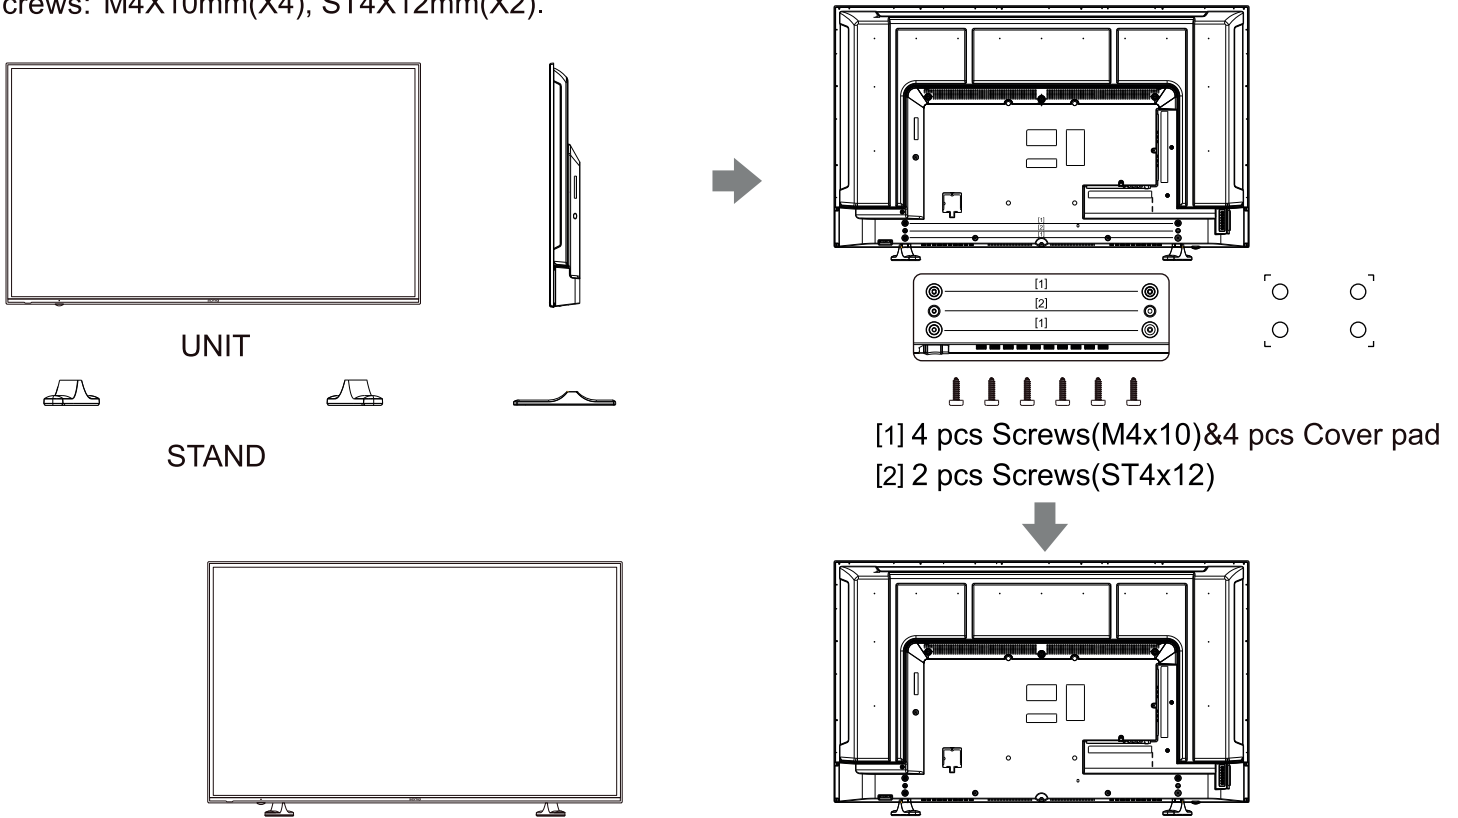

Installation finished

**Antenna Connection**

Your simply connect outdoor antenna to ANT IN to receive broadcasting signals.

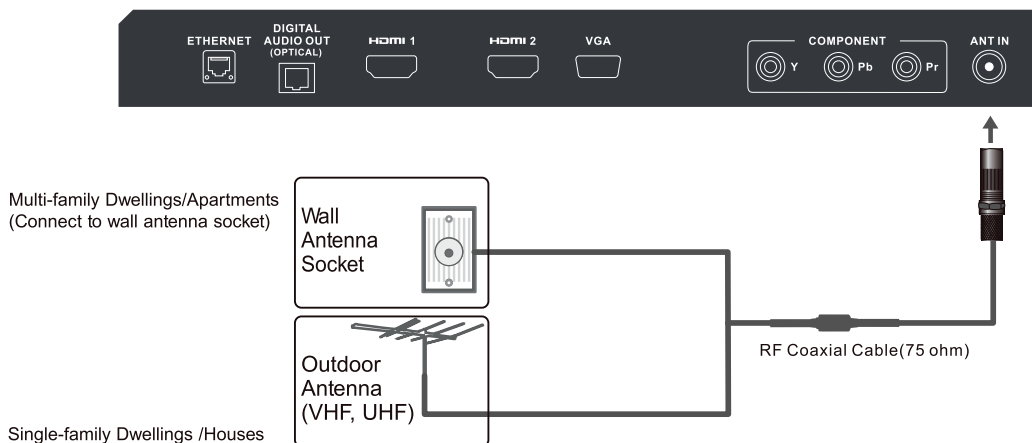


## Power On the Unit

Connect the Power Cord to the Power Outlet. Press the POWER Button on the Remote Control or STANDBY Button on the unit to turn on the TV.

POWER Button



Remote Control

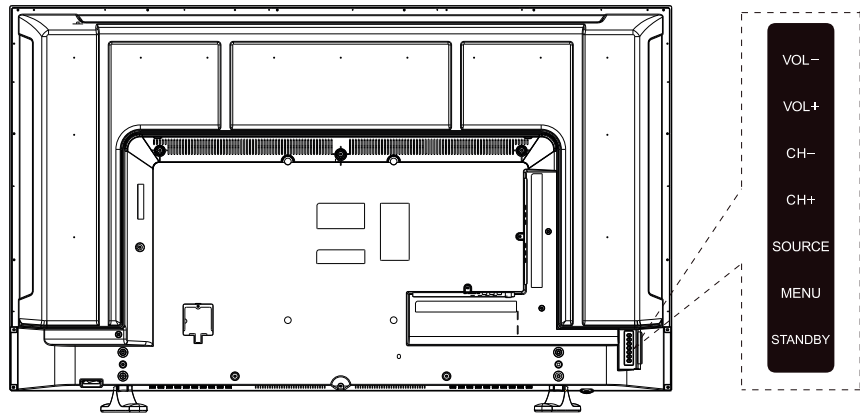

Back Side of TV

## TV Auto Scan





You can perform DTV Auto Search Program at below methods.

Method 1:

1. Initial Setup window will be appeared when you first start to use.
2. Press ◀/▶ button to select the Country, then press OK Button to proceed.
3. Press ▲/▼ button to select your location, and then press OK button to proceed.
4. Use ▲/▼ button to select the tuning type, press OK for channel tuning.
5. Press ▲/▼ button to select the setting mode you want ,then press OK to start channel tuning.



OK Button

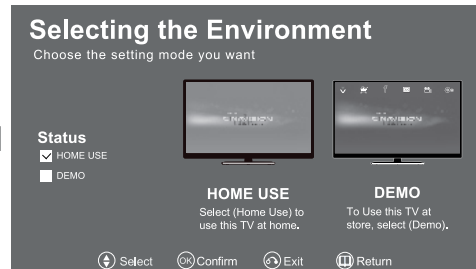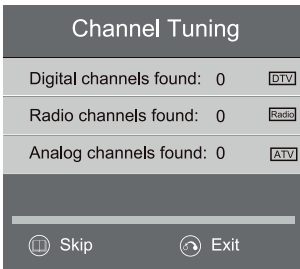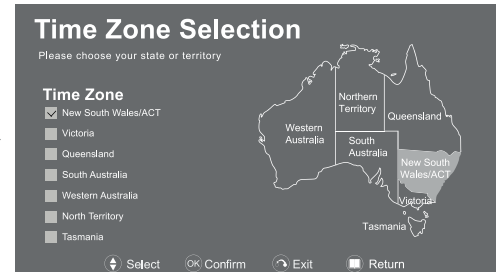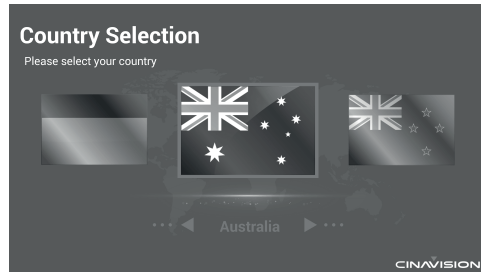

Method 2:


Press SOURCE Button to display the Source list

Press ▲/▼ button to select DTV and

Press OK button to confirm.



SOURCE Button

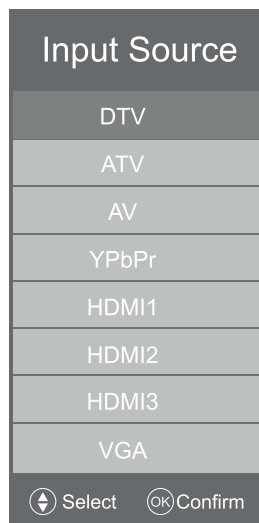


Press MENU Button to enter the CHANNEL page as follows:

1. Auto Tuning will be highlighted by entering this screen. Press to continue.
2. Press ◀/▶ button to select country, press OK Button to continue.
3. Use ▲/▼ button to select your location, then press OK button to enter the next step.
4. Press ▲/▼ button to select tuning type, press OK to channel tuning.
5. Press OK to start auto search.




For specific operation instruction, please refer to the Instruction Manual.


1. Press HOME button to visit the HOME page.
2. Select the Instruction Manual at the bottom of the application menu.  
Press OK button to view the Instruction Manual.

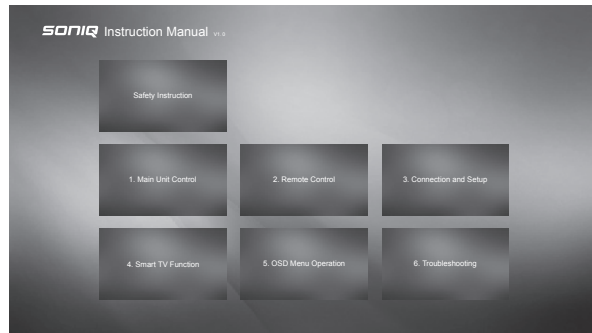

### Package Contents




1pc Main Unit




1 set Stand




1pc Remote Control  
AAA Batteries(X2)

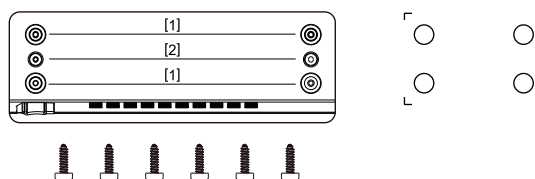

[1] 4 pcs Screws(M4x10)&4 pcs Cover pad  
[2] 2 pcs Screws(ST4x12)



1pc Warranty  
Card



1pc Quick  
Installation

## Specification

### Supported PC Input Signal

Your unit can use as PC monitor, it supports below.

RGB-PC, HDMI/DVI-PC mode INPUT SPEC				
PC/HDMI/1/2/3 input				
INPUT FORMAT	Resolution	Horizontal Frequency (KHz)	Vertical Frequency (Hz)	Standard
	640 X 480	31.5	60	VGA
	640 X 480	37.861	72.809	VESA
	640 X 480	37.5	75	VESA
	720 X 400	31.5	70	VGA-T
	800 X 600	37.9	60	VESA Guidelines
	800 X 600	48.077	72.19	VESA
	800 X 600	46.9	75	VESA
	832 X 624	49.7	75	Mac
	1024 X 768	48.4	60	VESA Guidelines
	1024 X 768	60	75	VESA
	1125 X 870	68.68	75	Mac
	1280 X 800	47.8	59.8	.....
	1280 X 960	60.0	60	VESA
	1360 X 768	47.7	60	VESA
	1280 X 1024	63.595	60	VESA
	1440 X 900	55.9	59.9	VESA
	1680 X 1050	65.3	60	.....
	1920 X 1080 (RGB-PC)	66.587	59.93	VESA
	1920 X 1080 (HDMI-PC)	67.5	60	VESA



Power Source	~200-240V AC, 50Hz 60Hz	
Power Consumption	110W	
Video Format Supporting	COMPONENT	480i, 480p, 576i, 576p, 720p (50/60Hz) 1080i (50/60Hz), 1080p (50/60Hz).
	HDMI	480p, 576p, 720p (50/60Hz), 1080i (50/60Hz), 1080p (23/24/25/30/50/60Hz).
Analog TV	TV System	PAL B/G; D/K; I
Digital TV	Programme Coverage	VHF-H 06 to 12 UHF 27 to 69
	Supports Resolution	1080i, 720p, 576p, 576i
	Audio Decoding	MPEG, AC 3
Panel Spec	Effective Display Area	1428.5mm x 803.5mm
	Panel Native Resolution	1920 x 1080 pixels
	Brightness	250cd/m <sup>2</sup>
	Contrast Ratio	5000 : 1
	Color Depth	8bit, 1.07G colors
	Expectation of Life	around 50,000 hours
Input/Output	ANT IN	ANT IN x 1
	YPbPr	YPbPr X 1
	USB IN	USB X 2
	VGA IN	VGA X 1
	VGA AUDIO	VGA AUDIO X 1
	AV IN	AV IN X 1
	Optical	output x 1
	LAN	RJ45 x 1
	HDMI IN	HDMI X 3
	TF	Micro SDx1
Wireless LAN Specification	Standard	IEEE802.11 802.11b/g/n
	Frequency Band	2.4~2.4835 GHz ISM Band
	Output Power	<13dBm@11n, <18dBm@11b, <14dBm@11g
Audio Power	8W + 8W	
Unit Dimension	1251 (L) x 308(W) x 768(H)mm	