

SONIQ

Bluetooth car kit *Instruction Manual*

Contents

Overview	2
Quick User Guide	3-5
Use in car	5
Use at office/home	5
Basic Operation	6
Getting Started	6
Charging	6
Switching On/Off	6
Switch off handsfree	6
Connect/Reconnect to phone	7-8
Pairing with a phone	9
Car and maintenance	10
Specification	10


Overview

Model VBT50-AU Bluetooth Portable Handsfree Car Kit

Thank you for selecting VBT50-AU Bluetooth portable handsfree car kit. It is a rechargeable speakerphone which is easy to operate in car and portable to use anywhere. It is specially designed for connecting Bluetooth compatible mobile phones without wires in car. No matter if the car is switched on or not, you can enjoy the freedom of wireless communication. No power connection or connection to the mobile phone is required. Using the single-button control of the handsfree, you can make and answer calls without touching the phone. You can even leave the phone in pocket or anywhere inside the car.

This handsfree car kit is specially designed for Bluetooth mobile phones or other Bluetooth compatible devices that support the Handsfree or Headset profiles.

The Bluetooth wireless technology is a worldwide specification for a small form-factor, low-cost and short-range (about 10 meters) radio solution providing links between mobile computers, mobile phones, other portable and handheld devices and connectivity to the internet.

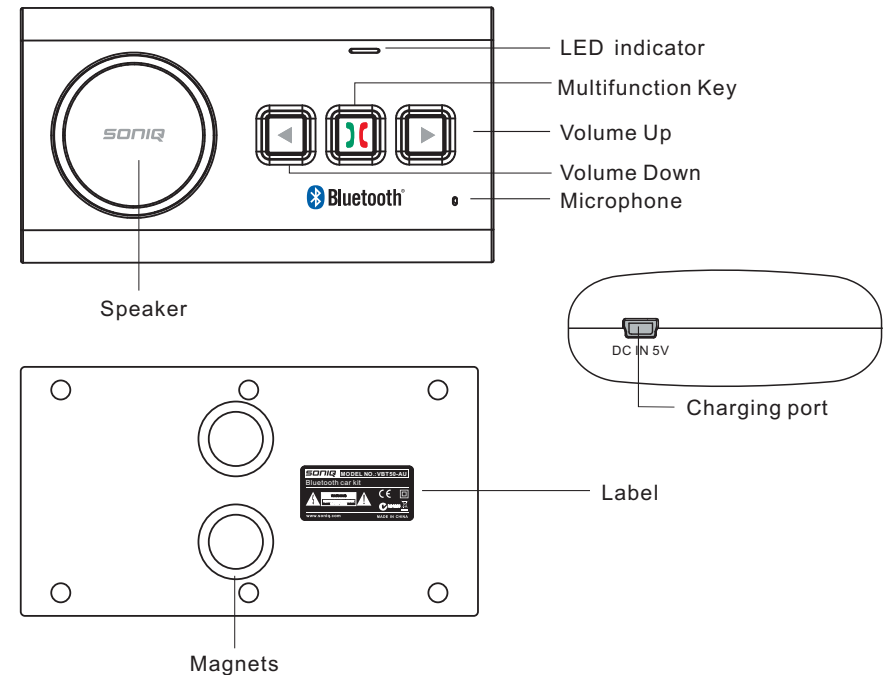

Quick User Guide



Status	Operation	LED Indicator& Sound
Swith On	Press and hold the Multifunction Key for 3 seconds	A low to high 'dodo' sound. Flashes blue every 2 seconds indicates in idle mode.
Swith Off	Press and hold the Multifunction Key for 5 seconds	A high to low 'dodo' sound and LED indicator goes off.
Connect/ Reconncet (with Paired phone)	Select paired device 'VBT50' on mobile phone, and then select 'Connect'	The red and blue are alternately flashing every second indicates searching for paired devices.
Pairing (for the first time using the handsfree)	<ol style="list-style-type: none"> 1、 Switch on the handsfree. 2、 Enable Bluetooth feature of the mobile phone. 3、 In the Bluetooth menu, select 'add device'or ' search device'. 4、 'VBT50' appears in the device list, press 'yes'. 5、 Enter fixed pass key '0000'. Pairing completes. 6、 Edit the device name if you would like to personalize it. 	<p>Flashes blue every 2seconds, indicates in idle mode.</p> <p>If connected with Handsfree Profile, blue always on indicates in standby mode.</p>
Receive Call	When handsfree is ringing, press Multifunction Key once.	Adjust Volume
Reject Call	When handsfree is ringing, press Multifunction Key twice.	Automatic shut down
End Call	During a call, press Multifunction Key once.	A 'do' sounds

Quick User Guide


Status	Operation	LED Indicator& Sound
Transfer to phone	During a call, press & hold "+"key for 3 seconds. To transfer back,press & hold "+" key for 3 seconds.	-
Redial last number	In standby mode, press Multifunction Key twice.	-
Voice dial	In standby mode, press Multifunction Key once.	A tone from the handsfree indicates the phone is ready to receive voice tag.
Mute microphone	During a call.click together '+'and '-'buttons once. Click again for un-mute.	(you can still hear the other side)
Adjust Volume	Clিকে '+'or '-'button to control the volume up or down	-
Automatic shut down	Handsfree will be switched off automatically if the connection between mobile phone and the handsfree breaks down for more than 15minutes.	A high to low 'dodo'sound
Low battery	-	Red and 'do' sound
Charging	Connect to charging	Red always on
Charging completed	Within 3 hours	Stops red

Quick User Guide


Use in car

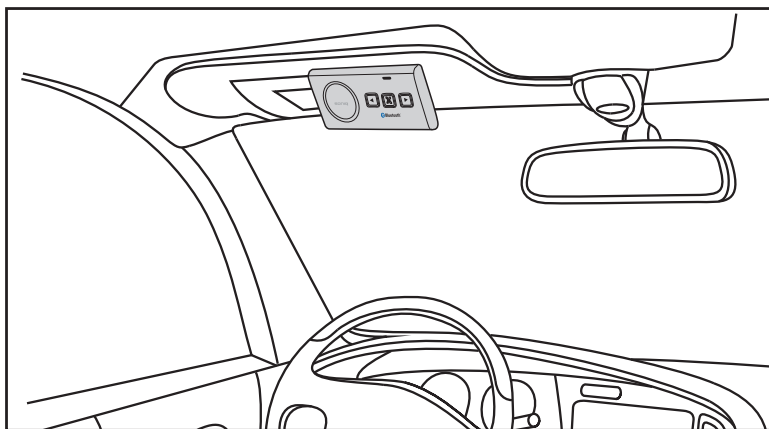

1、 Fix the provided metal clip onto sun visor from windscreen towards driver position as shown.




2、 Attach the magnet back of the handsfree to the fixed metal clip.




3、 Press and hold the Multifunction key for 3 seconds to switch on the handsfree.

Use at office/home



1、 Attach the metal clip to the back of the handsfree and put it on a flat surface.



2、 Press and hold the Multifunction key for 3 seconds to switch on the handsfree.

Basic Operation

Getting Started

For the first time using the handsfree, please:

- Charge handsfree with the provided charger for 2 hours.
- Ensure a Bluetooth function supporting mobile phone is ready for pairing.


Charging

Charge with saver Charge (cigarette light adaptor)

Switch on the handsfree.

Connect the saver charger to the in car cigarette socket, and then to the charging port of the handsfree.

LED indicator constantly red on .

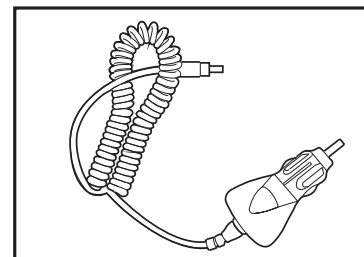

Notes:

- Maximum charging time: 3hours
- LED indicator stops red when fully charged.
- Talking time : up to 13 hours
Standby time: up to 200 hours
- Low battery signal: LED indicator flashes blue & red, 'do' sound until handsfree is recharged .
- Do not charge up to 24 hours.

Switch On /Off

Switch on handsfree

Press and hold the Multifunction Key for 3 seconds, you will hear a low to high 'dodo'sound and LED indicator flashes blue.

Switch off handsfree

Press and hold the Multifunction Key for 5 seconds,you will hear a high to low 'dodo'sound and LED indicator goes off.

Connect/Reconnect to phone

After the handsfree is switched on .It is waiting to be connected by mobile phone. The LED indicator flashes blue every 2 seconds indicates idle mode. When the handsfree and the device are disconnected, the handsfree will return back to idle mode.

TO connect with phone

EITHER

To connect with paired or reconnect with previously connected phone, press and hold Multifunction key for 3 seconds to switch on the handsfree. The handsfree will search and connect to the phone nearby automatically.
(The LED indicator flashes blue every second indicates the searching mode. The searching may last for ½ minute. If no phone can be found, the handsfree will return to idle mode.)

OR

To connect with the handsfree through the phone, in the setting menu of the phone,select 'VBT50' from 'Paired Device'. Select 'connect'and the phone will connect to the handsfree.

Handsfree Functions

Receive call	When handsfree is ringing. press Multifunction Key once to receive the call.
Reject call	When handsfree is ringing, press Multifunction Key twice to reject the call.
End call	During a call, press Multifunction Key once.
Transfer to phone	During a call, press& hold '+' key for 3 seconds.TO transfer back to handsfree. Press & hold '+' key once for 3 seconds
Redial the last number	In standby mode. Press Multifunction key twice. The last number will be redialed

Connect/Reconnect to phone

Voice dial

In standby mode. Press Multifunction Key once . You will hear a tone from the handsfree. It indicates the mobile phone is ready to receive tag. Speak the name of the person you wish to call. Then the mobile starts the voice dial automatically.
(Ensure the mobile phone supports Voice Control Dialing before use)

Mute microphone

To temporarily mute the microphone click together the volume '+' and '-' buttons once. You will hear 'do'sounds. This will allow you to hear the other side but the other side does not hear you. Press '+' and '-' again for un-mute

Adjust volume

Press '+' or '-' button to control volume up or down.

Shut down automatically: Handsfree will shut down automatically if the connection between the mobile phone and the handsfree breaks down for more than 15 minutes.

Redial the last number: voice dial and call transfer are supported by Handsfree Profile instead of Headset Profile. For using those functions. Please check if the mobile phone supports Handsfree Profile

Pairing with a phone

Before using the handsfree, you must pair it with the mobile phone first. Once the handsfree and the phone has paired they store the ID of each other. Thus they can connect each other automatically. You can check, delete or rename the paired device in the devices list of the mobile phone.

1. Place the Bluetooth handsfree and the Bluetooth mobile phone within a distance of 1 meter.

2. Switch on the Bluetooth mobile phone and enable Bluetooth feature. If the phone has 'profile' options, you are recommended to select 'Handsfree Profile' rather than 'Headset Profile'.

3. Press and hold the multifunction key for 6 seconds and the red and blue are alternately flashing every second indicates in paired status.

4. On the Bluetooth mobile, searching for device, 'VBT50' will appear in the device list.

5. Select device 'VBT50' and enter fixed pass key '0000'. Pairing completed. The LED indicator turns blue steadily indicates the handsfree is connected to the phone with Handsfree Profile.

6. Make sure the paired mobile has returned to main menu.

7. The volume is automatically set to middle level. For best performance, press '+' or '-' to adjust a suitable volume level.

Check if the mobile displays any message or icon which indicates the connecting status. After pairing completed, some phones automatically connect to handsfree immediately. Some phones keep waiting for building up the connection manually. In this case, press Multifunction key once, VBT50-AU will connect to the phone. Or you can select 'VBT50' from the "Paired Device" of the phone. The phone will connect to the handsfree. Please refer to your phone's user manual.

You should now be able to make wireless communication with the handsfree. Keep the distance between the handsfree and the mobile within 10 meters and free from obstacles. You can dial and receive calls by the phone, or activate the voice dialing to redial the last number and receive calls through the handsfree.

"Handsfree Profile" supports 'Voice dial', Redial the last number and Call transfer functions. If the mobile phone only supports Headset Profile, those functions are not available.

Care and Maintenance

- Check the laws and regulations on the use of mobile phones and handsfree equipment in the area where you drive.
- Always give full attention to driving. In some areas. You are required to pull off the road and park before making or answering a call.
- Do not expose it to handsfree to extreme temperature or direct sunlight
- Do not expose it to moisture or humidity. Keep it away from any liquid or Chemicals.
- Do not keep the device in dusty area. Only use a soft damp cloth to clean it.
- Do not attempt to disassemble the handsfree and the chargers.
- Do not try to replace the rechargeable battery inside the handsfree.
- Charge the handsfree only with the supplied charger.

Specification

Bluetooth Specification	Version 2.0 compliant
Bluetooth Profile Supported	Headset and Handsfree Profiles
Frequency Range	2.4GHz spectrum
Working Distance Range	10 Meters (class 2)
Dimensions(main unit)	115(L)×62(W)×21(T)mm
Weight (main unit)	110g
DSP	Full duplex transmission, noise suppression and echo cancellation.
Charging Time	Within 3 hours
Talking Time	Up to 13 hours
Standby Time	Up to 200 hours
Rechargeable Battery	Lithium-ion, 3.7V, 1000 mAh installed
Battery Protection	Over charge and over discharge protection
Input Current	400mA <internal controller>
Input Voltage	DC 5V
Speaker Power	2W<max>
Speaker Impedance	4 ohm
Sensitivity of Microphone	-60dB±2dB